

2835R Series

Standard 2835 package to address retrofit applications



2835R Series is a complementary portfolio with optimized performance and bin construction for the retrofit space. With an industry standard footprint, it provides the perfect balance between performance and cost efficiency for a variety of applications.

FEATURES AND BENEFITS

Flexible voltage configurations to comply with various different system solutions

Industry standard footprint for drop-in replacement designs

High maximum drive current to allow for reduction of LED count

Part Number Nomenclature

Part numbers for the 2835R Series follow the convention below:

L 1 2 8 – **A A B B R C 3 5 0 0 D D D**

Where:

A A - designates nominal CCT (27=2700K, 30=3000K, 35=3500K, 40=4000K, 50=5000K, 57=5700K, 65=6500K)

B B - designates nominal CRI (70=70CRI, 75=75CRI, 80=80CRI and 90=90CRI)

C - designates voltage (A=3V, B=6V, C=9V, D=18V, E=36V, F=54V)

D D D - designates Lumileds internal code (0A1, 0B1, 0C1, etc.=shares the same base part)

Therefore, the following part number is used for a 2835R 3000K, 80CRI, 36V LED:

L 1 2 8 – **3 0 8 0 R E 3 5 0 0 0 A 1**

Lumen Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long- term performance of this product.

Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. The 2835R Series is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Mass Production List of 2835R Series

Product	Product Number	CCT	Ra Min	Φ(lm) Min	Φ(lm) Typ	Φ(lm) Max	Test conditions
2835R 3V	L128-2790RA35003A1	2700	90	25	26	-	25℃ , IF=60mA
	L128-2890RA35003A1	2800	90	26	27	-	
	L128-3090RA35003A1	3000	90	26	27	-	
	L128-3190RA35003A1	3100	90	26	27	-	
	L128-3590RA35003A1	3500	90	26.5	27.5	-	
	L128-3690RA35003A1	3600	90	26.5	27.5	-	
	L128-4090RA35003A1	4000	90	27.5	28.5	-	
	L128-5090RA35003A1	5000	90	27.5	28.5	-	
	L128-5790RA35003A1	5700	90	27.5	28.5	-	
	L128-6590RA35003A1	6500	90	27.5	28.5	-	

Notes:

- 1.Tolerance of Color Rendering Index: ± 2 .
- 2.Tolerance of Luminous flux: $\pm 5\%$.

Absolute maximum ratings

Parameter	Symbol	Value	Unit
Power dissipation	Pd	290	mW
Forward current	IF	100	mA
Operating temperature range Γ	Top	-40~+105	°C
Storage temperature range	Tstg	-40~+105	°C
Heatresistance	Rth	16	°C/W
Junction temperature	Tj	125	°C
Electrostatic Discharge	ESD	2000	V

Electro-optical characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward voltage	Vf	2.6	-	2.9	V	IF=60mA
Luminous flux	Φ	25	-	-	lm	IF=60mA
Viewing Angle	2 θ 1/2	-	120	-	Deg	IF=60mA
Reverse current	IR	-	-	10	μ A	Vr=5V
Color Index	Ra	90	-	-	-	IF=60mA

NOTES:

- * The measurement of forward voltage maintains a tolerance of $\pm 0.05V$, flux maintains a tolerance of $\pm 5\%$.
- * Ra measurement tolerance is ± 2 .
- * Rth j-sp is the thermal resistance from LED junction to solder point on MCPCB with electrical power.
- * the product is not designed to be used under reverse voltage.


Reliability Test Items And Conditions

Test Items	Test condition	Time	Quantity	Ac/Re
Reflow Soldering	Temp. :260°C/10sec.	6Min.	22pcs	0/22
Thermal Shock	-40~125C, 15min dwell, 10sec transfer	100Cycles	22pcs	0/22
High Temperature High Humidity life Test	85°C,85%RH, IF=60mA	1000Hrs.	10pcs	0/10
Low Temperature Storage	Ta=-40°C	1000Hrs.	10pcs	0/10
High Temperature Storage	Ta=105°C	1000Hrs.	10pcs	0/10
High Temperature Operation Life Test	Ta=85°C, IF =60mA.	1000Hrs.	10pcs	0/10


Failure Criteria

Item	Symbol	Failure Criteria
Luminous Flux	Lm	$\geq 70\%$
Forward voltage	VF	$\pm 10\%$
Colour	CIE_X CIE_y	± 0.01

Typical optical characteristics curves

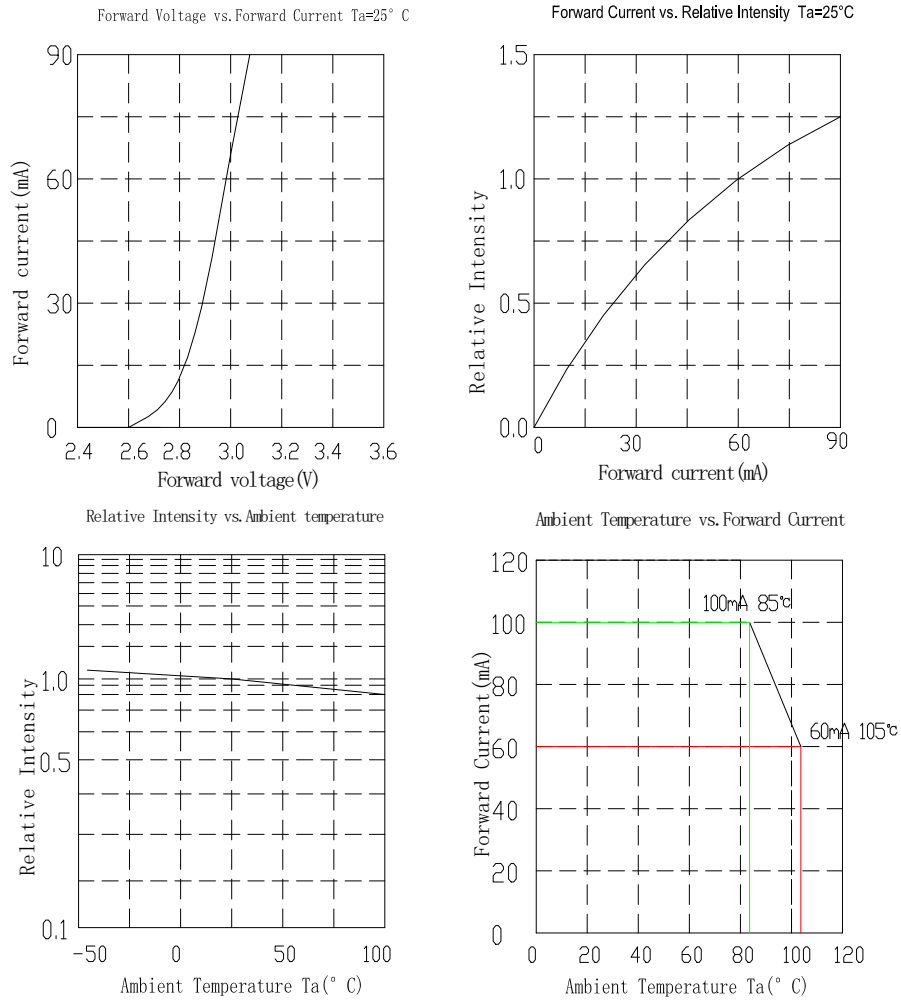


Curves of beam angle and relative brightness


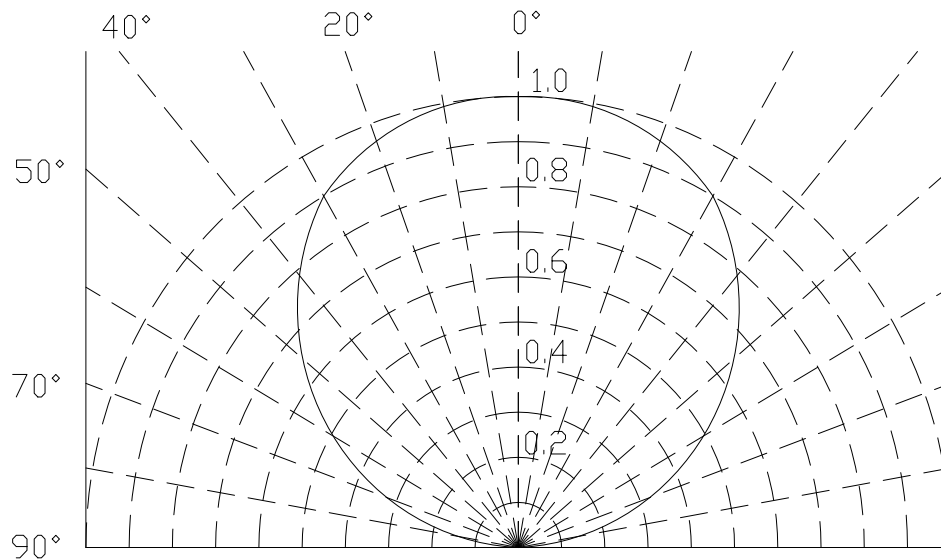


life test

Affect of Tj on Luminous Maintenance
(If=60mA)
(Dot line: Expected Life)

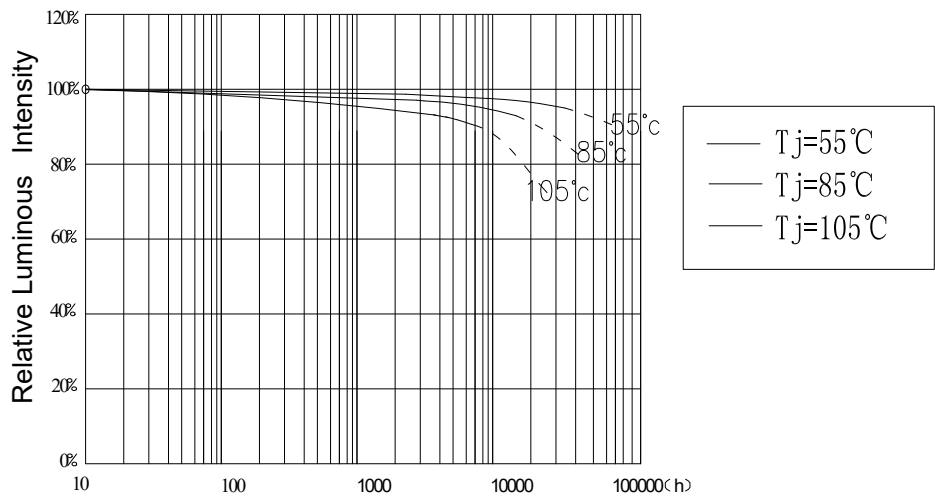

Mechanical Dimensions: Unit (mm)

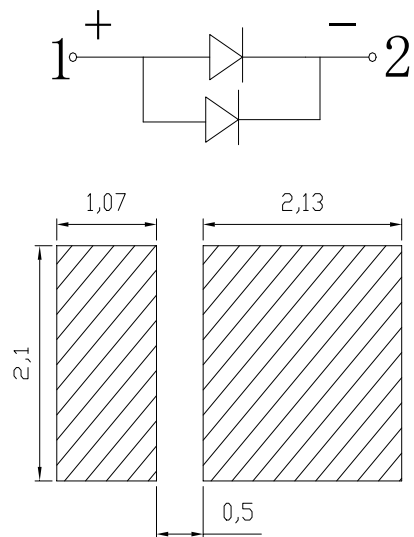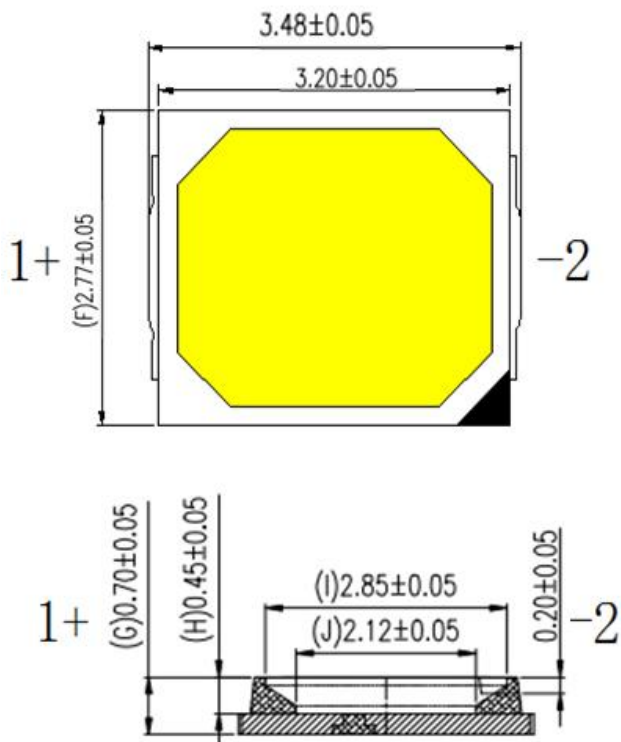

For reflow soldering

Product Bin and Labeling Definitions

Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins LED components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

2835R Series LEDs are labeled using a 5-digit alphanumeric CAT code following the format below

Where:

A B C D E

A - designates luminous flux bin (example: B=95 to 100 lumens, G=140 to 150 lumens)

B C D - designates correlated color bin (example: A27, A30, A35, A40, A50, A57, A65)

E - designates forward voltage bin (example: B=34.5 to 35.0V, J=38.0 to 38.5V)

Therefore, a 2835R LED with a lumen range of 95 to 100, color bin of A35 and a forward voltage range of 38.0 to 38.5V has the following CAT code:

B A 3 5 J

Luminous Flux Bins

Luminous flux bin definitions for 2835R Series at rated current, Ta=25°C .

Product Number	Bin	Min	Max
L128-xx90RA35003A1	D	24	26
	E	26	28
	F	28	30

Notes



Lumileds Maintains a tolerance of $\pm 5\%$ on lumionous flux measurements

Forward Voltage Bins

Forward voltage bin definitions for 2835R Series at rated current, Ta=25°C .

Product Number	Bin	Min	Max
L128-xx90RA35003A1	A	2.6	2.7
	B	2.7	2.8
	C	2.8	2.9

Color Bin Definition

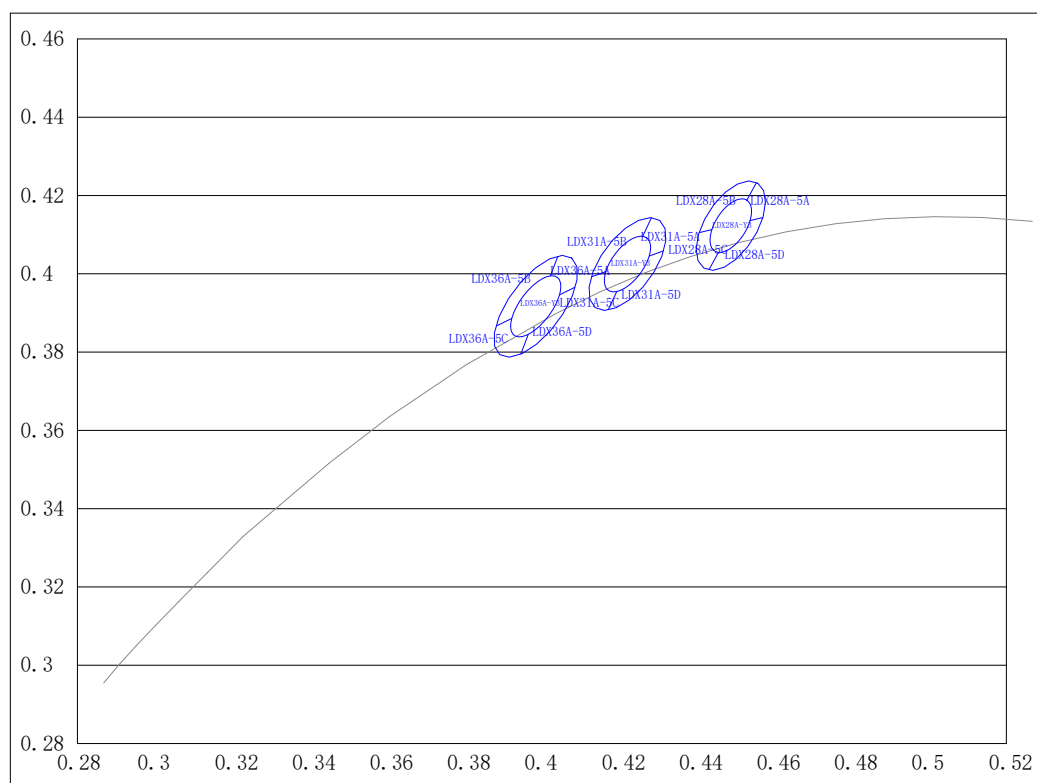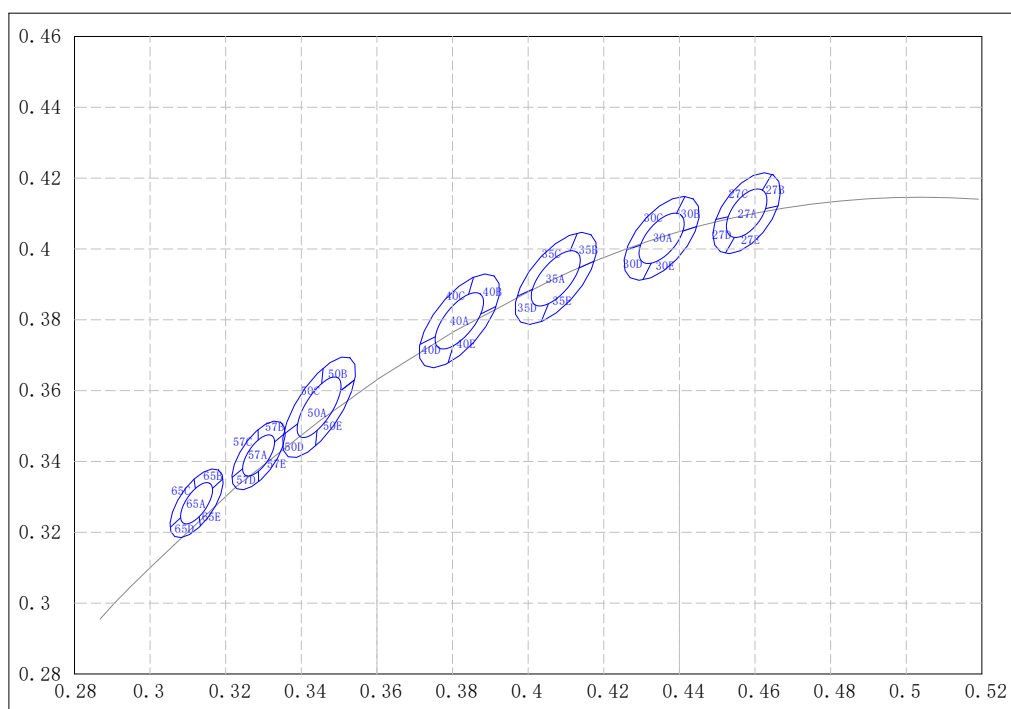

**Correlated color temperature bin definitions for 2835R Series at rated current,
Ta=25°C**

CCT	Color space	Center X	Center Y	a	b	Rotation Angle
2700K	3-Step	0.4578	0.4101	0.0077	0.004	57.28
	5-Step	0.4578	0.4101	0.0129	0.0067	57.28
3000K	3-Step	0.4353	0.403	0.008346	0.004098	53.16
	5-Step	0.4353	0.403	0.01391	0.006831	53.16
3500K	3-Step	0.4073	0.3917	0.009271	0.004139	52.96
	5-Step	0.4073	0.3917	0.015452	0.006899	52.96
4000K	3-Step	0.3818	0.3797	0.009386	0.004035	54
	5-Step	0.3818	0.3797	0.015644	0.006725	54
5000K	3-Step	0.3447	0.3553	0.00971	0.0036	59.62
	5-Step	0.3447	0.3553	0.016183	0.006	59.62
5700K	3-Step	0.3287	0.3417	0.006617	0.002855	58.38
	5-Step	0.3287	0.3417	0.011029	0.004758	58.38
6500K	3-Step	0.3123	0.3282	0.006617	0.002855	58.38
	5-Step	0.3123	0.3282	0.011029	0.004758	58.38

bin Colde	27A/B/C/D/E		30A/B/C/D/E		35A/B/C/D/E		40A/B/C/D/E	
CCT	2700K		3000K		3500K		4000K	
#	x	y	x	y	x	y	x	y
1	0.4813	0.4319	0.4577	0.426	0.4299	0.4165	0.4005	0.4044
2	0.4688	0.429	0.4446	0.4213	0.4148	0.409	0.3866	0.3955
3	0.4562	0.426	0.4314	0.4165	0.3996	0.4015	0.3726	0.3866
4	0.4468	0.4077	0.4238	0.399	0.3943	0.3853	0.3693	0.3719
5	0.4373	0.3893	0.4162	0.3814	0.3889	0.369	0.366	0.3572
6	0.4483	0.3919	0.4275	0.3854	0.4018	0.3752	0.3779	0.3644
7	0.4593	0.3944	0.4388	0.3893	0.4147	0.3814	0.3897	0.3716
8	0.4703	0.4132	0.4483	0.4077	0.4223	0.399	0.3943	0.3853
bin Colde	50A/B/C/D/E		57A/B/C/D/E		65A/B/C/D/E			
CCT	5000K		5700K		6500K			
#	x	y	x	y	x	y		
1	0.3587	0.3792	0.3377	0.3617	0.3206	0.3482		
2	0.346	0.3687	0.3285	0.3533	0.3112	0.3388		
3	0.3333	0.3583	0.3194	0.345	0.3018	0.3294		
4	0.3331	0.3458	0.3201	0.334	0.3038	0.3199		
5	0.3329	0.3333	0.3208	0.3231	0.3059	0.3104		
6	0.3435	0.3416	0.3287	0.33	0.3138	0.3181		
7	0.3541	0.35	0.3367	0.337	0.3221	0.3261		
8	0.3564	0.365	0.3372	0.3493	0.3213	0.3371		


CCT	Color space	Center X	Center Y	a	b	Rotation Angle
2800K	3-Step	0.4488	0.4123	0.0077	0.004	57.28
	5-Step	0.4488	0.4123	0.0129	0.0067	57.28
3100K	3-Step	0.4221	0.4025	0.00835	0.00410	53.16
	5-Step	0.4221	0.4025	0.01391	0.00683	53.16
3600K	3-Step	0.3984	0.3917	0.009271	0.004139	52.96
	5-Step	0.3984	0.3917	0.015452	0.006899	52.96

bin Colde	LDX28A-Y3/5A/B/C/D		LDX31A-Y3/5A/B/C/D		LDX36A-Y3/5A/B/C/D	
CCT	2800K		3100K		3600K	
#	x	y	x	y	x	y
1	0.4723	0.4341	0.4445	0.4255	0.421	0.4165
2	0.4598	0.4312	0.4314	0.4208	0.4059	0.409
3	0.4472	0.4282	0.4182	0.416	0.3907	0.4015
4	0.4378	0.4099	0.4106	0.3985	0.3854	0.3853
5	0.4283	0.3915	0.403	0.3809	0.38	0.369
6	0.4393	0.3941	0.4143	0.3849	0.3929	0.3752
7	0.4503	0.3966	0.4256	0.3888	0.4058	0.3814
8	0.4613	0.4154	0.4351	0.4072	0.4134	0.399

Notes

Tester tolerance: ± 0.01 in x and y coordinates

Requirements for application and reflow soldering:

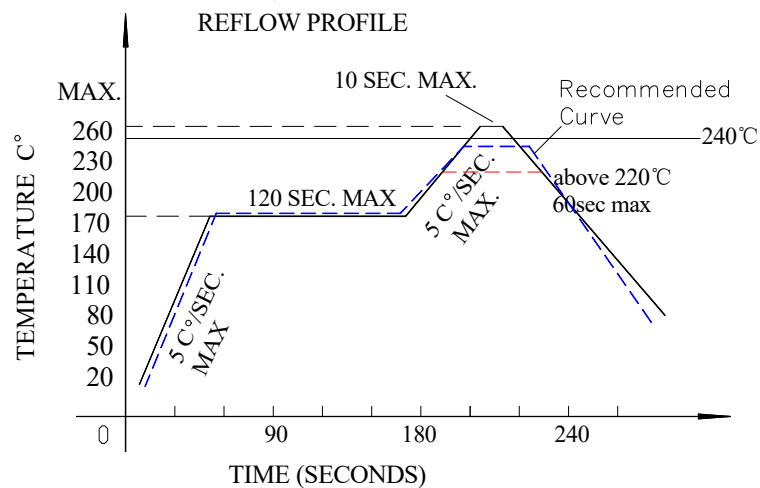

Reflow soldering curve

(Product is highest resistant to 260°C reflow but suggested the highest temperature of 240°C within)

■ Notes for reflow soldering:

1. No more than twice for reflow soldering.
2. To ensure the quality of our LEDs, we encapsulate them with silica gels. So please do not put pressure on the LEDs.
3. Please choose the right nozzle(try to learn from the plastic products parts) to avoid the damage to products due to the pressure.
4. Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground.

■ Handwork soldering:

1. During the soldering, the electronic soldering iron must be kept under the temperature of 300°C and the soldering time must not be beyond 3 seconds. No touch between the electronic soldering iron and colloid.
2. Handwork soldering is only allowed once. We won't take responsibility for more than that.
3. Avoid using sharp objects to compress products Colloidal Part directly.
4. Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground.